

DIS-40H UV-Block V2


Our V2 series lamp
retains the
performance of the
VIVID series with 5700K
color temperature,
range of LEDs,
eliminating the gap
between HMI and LED.



SPECIFICATIONS DIS-40H UV-Block V2

Electrical Date	Lamp Voltage	200V
	Nominal Current	20A
	Nominal Wattage	4,000W
Photometrical Date	Nominal Lumens	380,000lm
	Color Temperature	6,000K
	Color Rendering Index	≥90
	Average Life	500h
Dimensions/Additional Date	Diameter	75mm(A)
	Length	255.5mm(B)
	Light Center Length(LCL)	142mm(C)
	Base Type	G38
	Burning Position	ANY
	Hot-Restart	Yes


DIMENSIONS

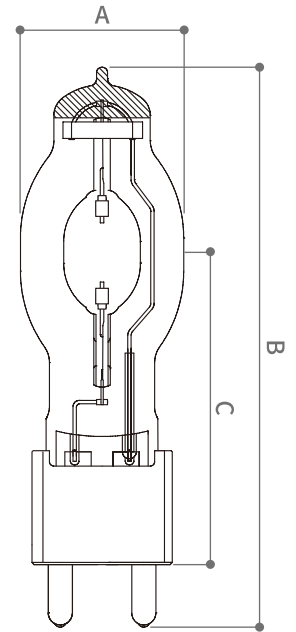

FEATURES

Our V2 series lamp retains the performance of the VIVID series with 5700K color temperature, range of LEDs, eliminating the gap between HMI and LED. Save the time and extra work for color adjustment.

SPECTRUM

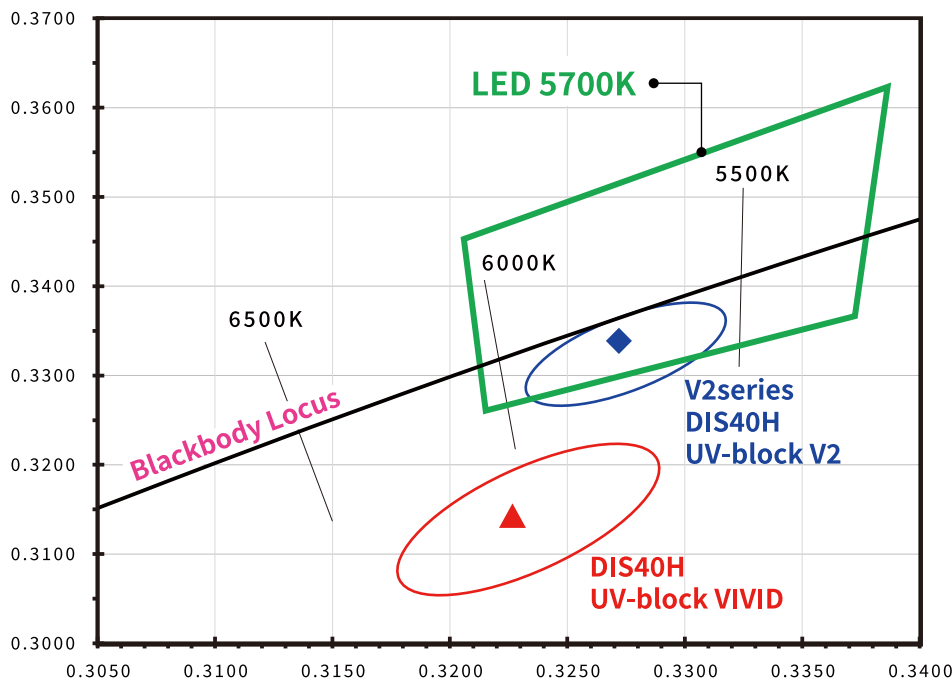

- Nominal wattage 4000W
- High CRI of ≥ 90
- Color Temperature of 6000K(daylight)

Koto Electric Co., Ltd.

2-17-3 Ryusen, Taito-ku, Tokyo 110-0012, Japan
Tel: 03-5808-1850 Fax: 03-5808-1910
www.koto-jp.com



LO40B01