



BB-001

LED BASE LIGHT

■ FEATURE

BB-001 LED base light can be adjusted between 2800K ~ 6500K, and offers a variety of excellent effects with high color rendering, high output with superior light distribution.


■ SPECIFICATIONS

Beam angle [°]	110 (Half Peak Angle)
CCT [K]	2800~6500
CRI	Typ97
TLCI	Typ99
Dimming [%]	0~100
Power consumption [W]	150 (max)
Weight [g]	3,850
	4,650 (with Yoke)
	5,750 (with Yoke + AC Adapter)
Power supply [V]	AC Adapter: 100~240VAC
	V-Mount: DC12~30V
DMX control IP	DMX512/RDM
Number of Channel [ch]	2ch
Dimmension [L×W×H]	132.6×542×389.4 (w/y)

■ PHOTOMETRIC DATA

Range	1m (3.3ft)	3m (9.8ft)	5m (16.4ft)
CCT 2800K [lx]	4,200	500	180
CCT 6500K [lx]	4,600	550	200

■ DIMMENTION

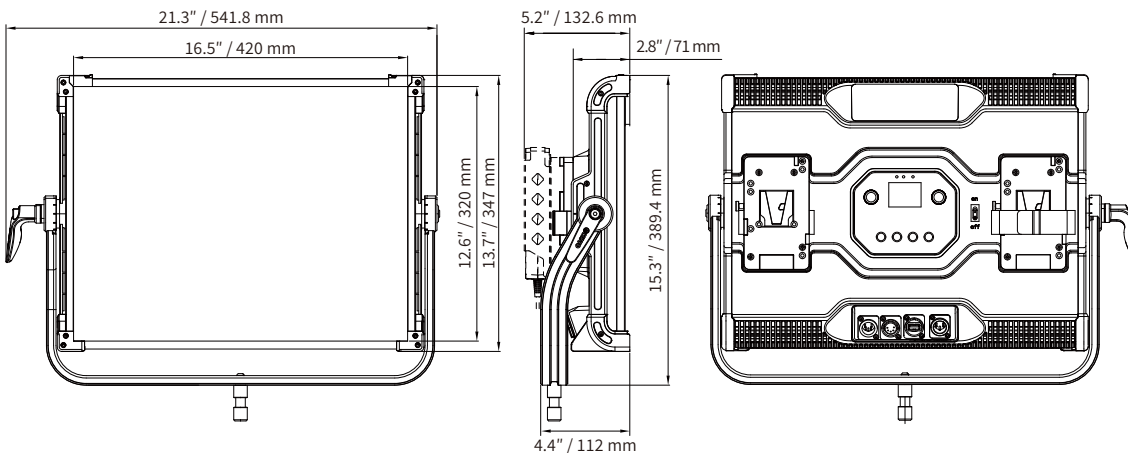

■ ACCESSORY

Barndoor



Koto Electric Co., Ltd.

2-17-3 Ryusen, Taito-ku, Tokyo 110-0012, Japan
 Tel: 03-5808-1850 Fax: 03-5808-1910
 www.koto-jp.com
 LOBB01

